


Accessories

Connecting cable

Description **SFW-M12C4/AW-0,5PU**

Article number **6075689090**

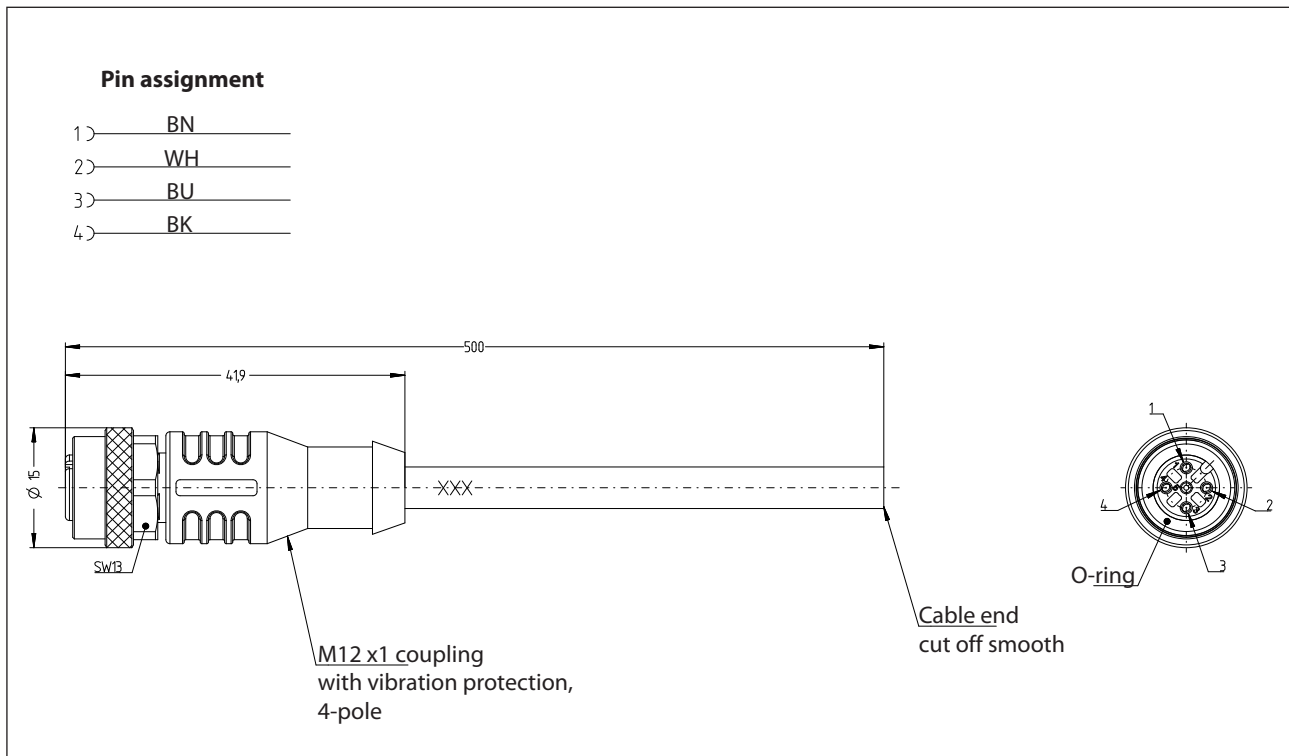

Electrical Data

Operating voltage	max. 250 V
Current rating	4 A at 40 °C
Insulation resistancw	≥100 MΩ

Mechanical Data

Connection	M12x1, 4-pole (A-Coded)
Cable	LiF9YH-11YH 4 x 0,34 mm ² x 0,5 m +20 mm, outer-jacket PUR UL, black
Overmolding	TPU
Ambient temperature	-30 °C ... +90 °C
Degree of pollution	3
Type of protection	IP68 (only in fully snapped-in position with it's plugs)